



FloorCare


**Absolutely
Unsurpassed
for Power,
Performance,
and
Productivity**

The Brute is the strongest 115V floor machine on the market. Whatever the job – The Brute will handle it! Whenever you need a floor machine you can rely on to handle the toughest jobs, turn to the Hawk for the best. This line up of extra heavy duty performers is absolutely unbeatable. Especially suited for marble, concrete, floor scraping, sanding, and any other extreme situation.



**UL/CUL
Approved
Machine**

Hawk Preferred BRUTE Floor Machines with 180-Frame TEFC Motor

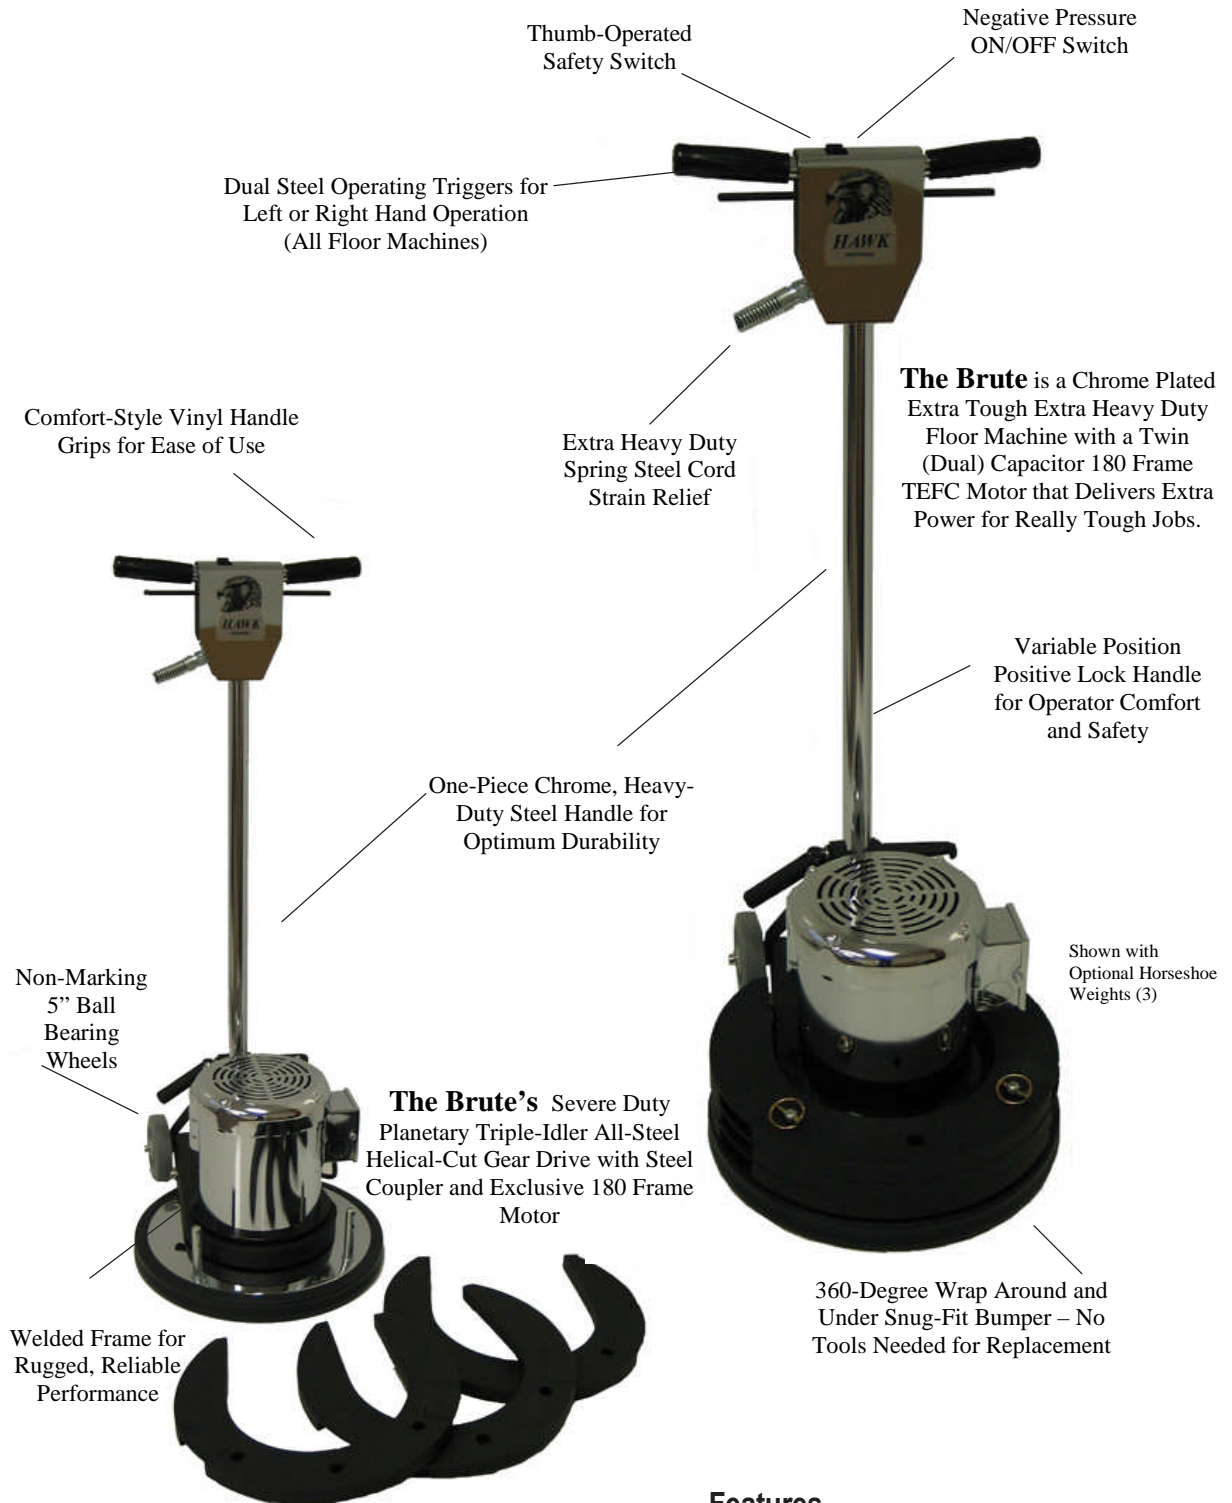

Totally enclosed motor units are ideal for the harshest conditions – dust, moisture, chemicals – and great for sanding or screening applications, stone care and concrete work.

Note: These units are NOT explosion-proof.

Features

- Totally enclosed fan-cooled motor keeps out dirt and dust for longer motor life.
- Virtually indestructible gearbox
- Low current draw
- UL/CUL Approved
- Private label and/or custom colors available at no extra cost with customer-supplied labels.



Poly Brush



Nylon Brush



Sand Paper Driver



Pad Driver



Pads



4 Gallon Tank
(Available in Eight (8)
Different Colors)



HAWK
Enterprises, Inc.

Technical Specifications

Model #	HP1513-180BRUTE	HP1515-180BRUTE	HP1517-180BRUTE	HP1520-180BRUTE
Part#	F0013-180CP	F0006-180CP	F0009-180CP	F0012-180CP
Pad Size	13 inch	15 inch	17 inch	20 inch
Power Source*	115V 60Hz	115V 60Hz	115V 60Hz	115V 60Hz
Motor/HP	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor
Amp Draw	7.2	7.5	7.9	8.4
Gear Box	3-Idler 11:1	3-Idler 11:1	3-Idler 11:1	3-Idler 11:1
Brush RPM	165	165	165	165
Cord **	50' 14-3 STO	50' 14-3 STO	50' 14-3 STO	50' 14-3 STO
Weight	113 lbs	117 lbs	123 lbs	125 lbs
Shipping Weight	120 lbs	124 lbs	130 lbs	132 lbs

Specifications subject to change without notice. **Brute is Chrome Plated while the TEXHD is Powder Coated with Paint**

Model #	HP1513TEXHD	HP1515TEXHD	HP1517TEXHD	HP1520TEXHD
Part#	F0013-180TEXHD	F0006-180TEXHD	F0009-180TEXHD	F0012-180TEXHD
Pad Size	13 inch	15 inch	— 17 inch	20 inch
Power Source*	115V 60Hz	115V 60Hz	115V 60Hz	115V 60Hz
Motor/HP	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor	180 Frame, 1-1/2 HP TEFC AC Dual Capacitor Motor
Amp Draw	7.2	7.5	7.9	8.4
Gear Box	3-Idler 11:1	3-Idler 11:1	3-Idler 11:1	3-Idler 11:1
Brush RPM	165	165	165	165
Cord **	50' 14-3 STO	50' 14-3 STO	50' 14-3 STO	50' 14-3 STO
Weight	113 lbs	117 lbs	123 lbs	125 lbs
Shipping Weight	120 lbs	124 lbs	130 lbs	132 lbs

* 230V Available

** 75 Foot Cord Available

*** 100 Foot Cord Available

Other Accessories Available:

- Orbitec Diamond Driver
- Weighted Diamond Pad Driver
- Surface Prep Tool (Carbide Cutters)
- Motor Mounted Weight Post Kit
- Motor Mounted Dust Control System
- Splashguard



A0032-1P -- Optional 25#
Horseshoe Weights (each)

Hawk Enterprises, Inc.
52744 Park Six Court
Elkhart, IN 46514
(888) 289-4295 Phone
(574) 294-1910 Phone
(866) 429-5329 Fax
(574) 970-0289 Fax

Made in the USA

www.hawkenterprises.com
E-Mail: tkershner@hawkenterprises.com

Distributed By: